

RF 0° 10&24-Way



T33



T23



T25

0°Power Splitters/Combiners 50Ω/75Ω



10Way													
Model No.	Freq. Range (MHz) fL-fU	Insertion Loss (dB)			Isolation (dB)			(VSWR)		Unbalance		Case Style	
		L	M	U	L	M	U	Max		Phase	Amp		
		Typ/Ma	Typ/Ma	Typ/Ma	Typ/Min	Typ/Min	Typ/Min	In	Out	(°) Max	(dB) Max		
CMIFLT-10-1	0.5-100	0.5/0.8	0.4/1.0	1.8/1	30/20	30/20	25/20				10	0.4	T23
CMIFLT-10-0809	800-900		1.5/2.0			25/20						0.6	T23
CMIFLT-10-0820	800-2000		1.0/2.5			25/18						1.2	T23

24Way													
Model No.	Freq. Range (MHz) fL-fU	Insertion Loss (dB)			Isolation (dB)			(VSWR)		Unbalance		Case Style	
		L	M	U	L	M	U	Max		Phase	Amp		
		Typ/Ma	Typ/Ma	Typ/Ma	Typ/Min	Typ/Min	Typ/Min	In	Out	(°) Max	(dB) Max		
CMIFLT-24-1	0.2-100	1.0/2.0	1.0/2.0	1.0/2.0	25/20	35/30	25/20					0.5	T25
CMIFLT-24-11	1-200	0.9/1.7	1.0/1.8	1.3/2.2	30/25	22/20	0/17					0.8	T25
CMIFLT-24-11-75	1-200	0.6/1.3	0.8/1.5	1.1/2.0	35/25	30/20	225/20					0.6	T25

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

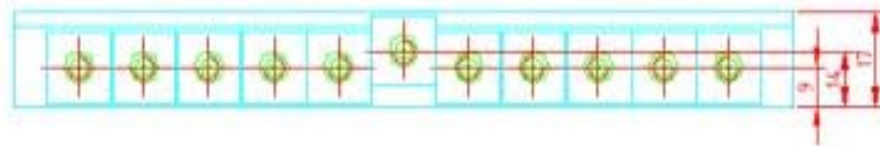
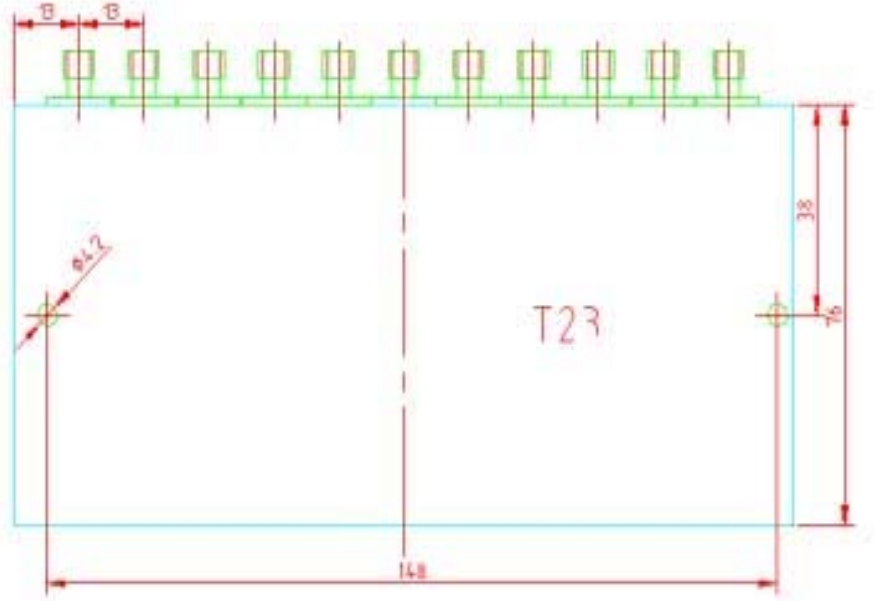


T23



CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

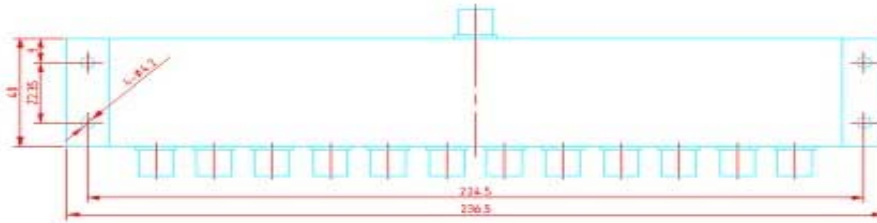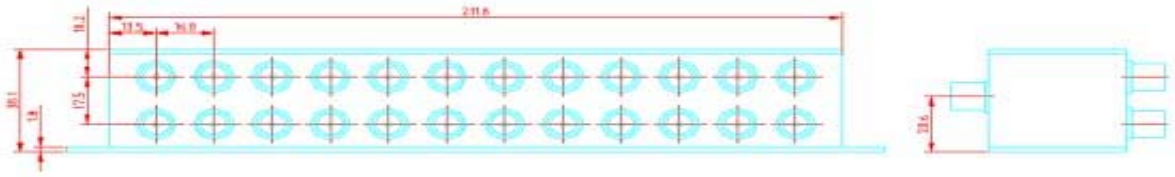

T25

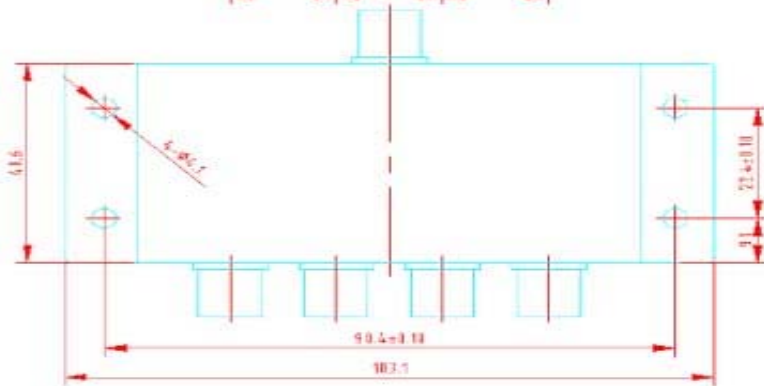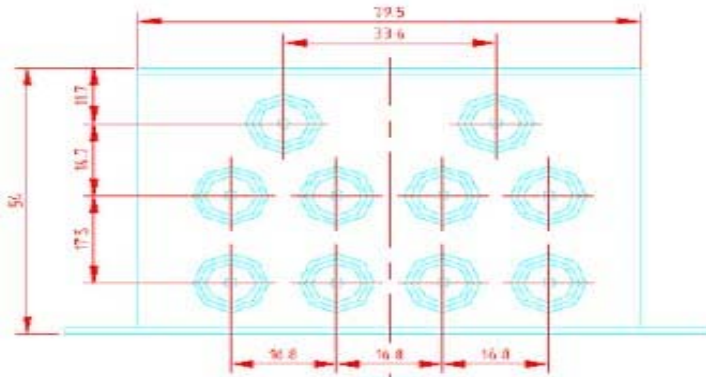

T33

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.